



MultiPlus
48V | 5000VA | 70A

charger

- mains on
- bulk
- absorption
- float

- on
- off
- charger only

- battery charger
- powerassist

- sinewave inverter
- parallel connectable

inverter

- inverter on
- overload
- low battery
- temperature

- transfer switch
- three phase connectable

AC transfer capacity: 100 A | Inverter 230 V

Before charging read the instructions. For indoor use only. Checkered warning signs mean an electric shock can be caused by the battery terminals. Inappropriate wiring, incorrect polarity and short circuits can lead to overheating. During charging, a charge will still be taken from the battery.



energy
POWER

0%

descargando
295W
54.8V · 5.4A

SISTEMA

HUB-1

Invirtiendo

ESTADO

13:45

sin alarmas

RADA CA

CARGAS CA


263W

CARGADOR TV

657W

color control



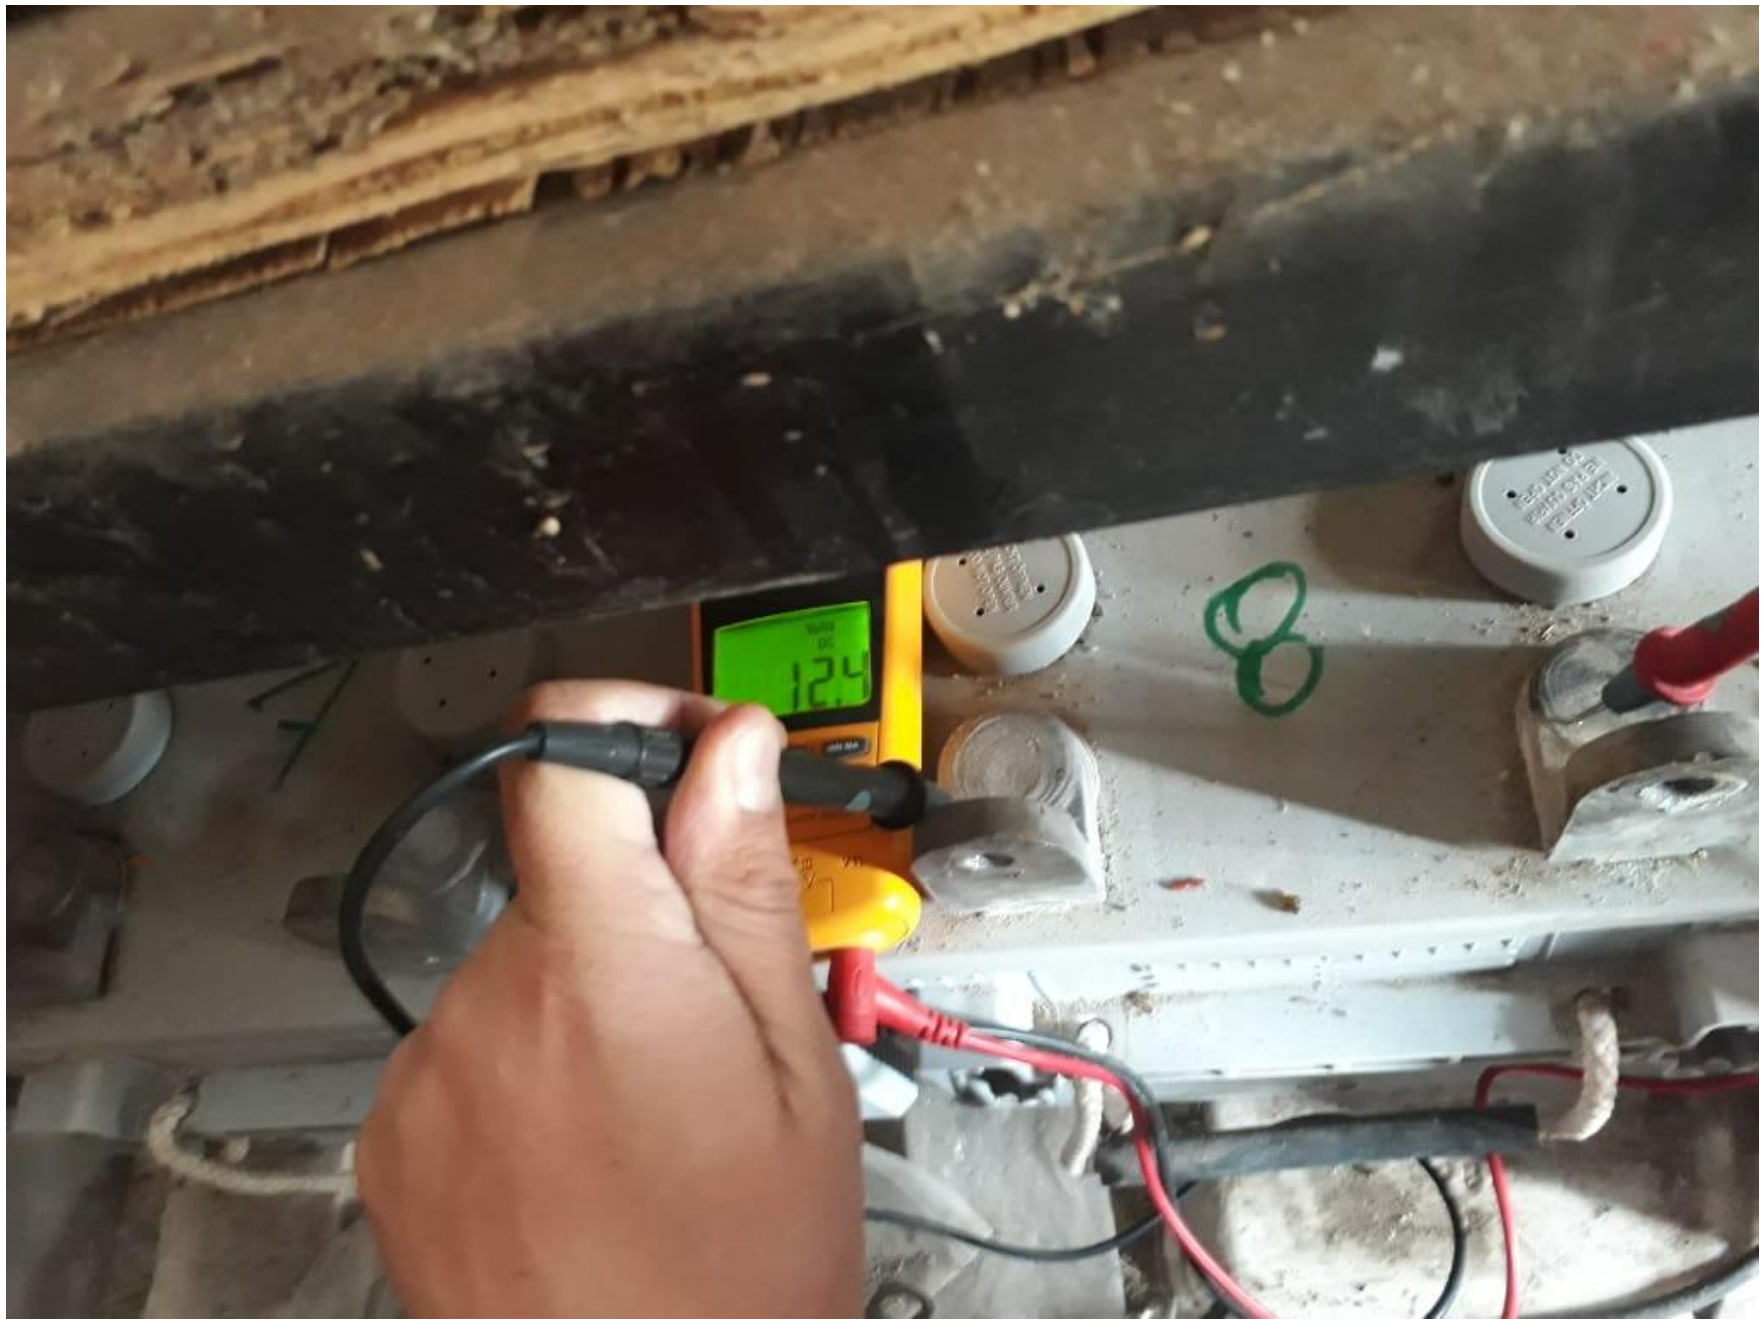







www.victronenergy.com

 **victron energy**
BLUE POWER



+

setup ● ● ● select

-

BlueSolar charge controller
MPPT 150 V | 85 A

CE

